DRL1066RL

DDR3-1066, PC3L-8500, Registered, ECC, 1.35V, 240-pin DIMMs

Products in Family

DRL1066RQL/16GB (1 x 16GB 4Rx4 DIMM)

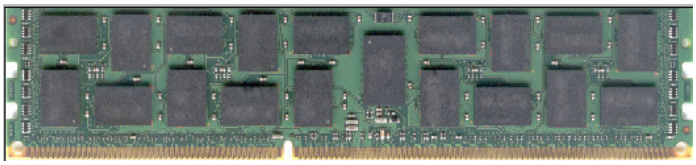

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35 V ±0.075 (1.5 V tolerant) Fully RoHS Compliant Thermal Sensor Heat Spreader	Each DRL1066RL upgrade consists of a single DDR3-1066 Registered DIMM that conforms to JEDEC's DDR3, PC3L-8500 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	Dell Product	Supported in these Dell systems:
DRL1066RQL/16GB	A5180241, A5180244, A5180152, A5180153, A5180154, A5180243, A5180155, A5180156, A5180157, A5180158, A5180242, A5185910	Dell PowerEdge C6100, M610, M610X, M710, M710HD, M915, R410, R510, R715, R810, T410

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

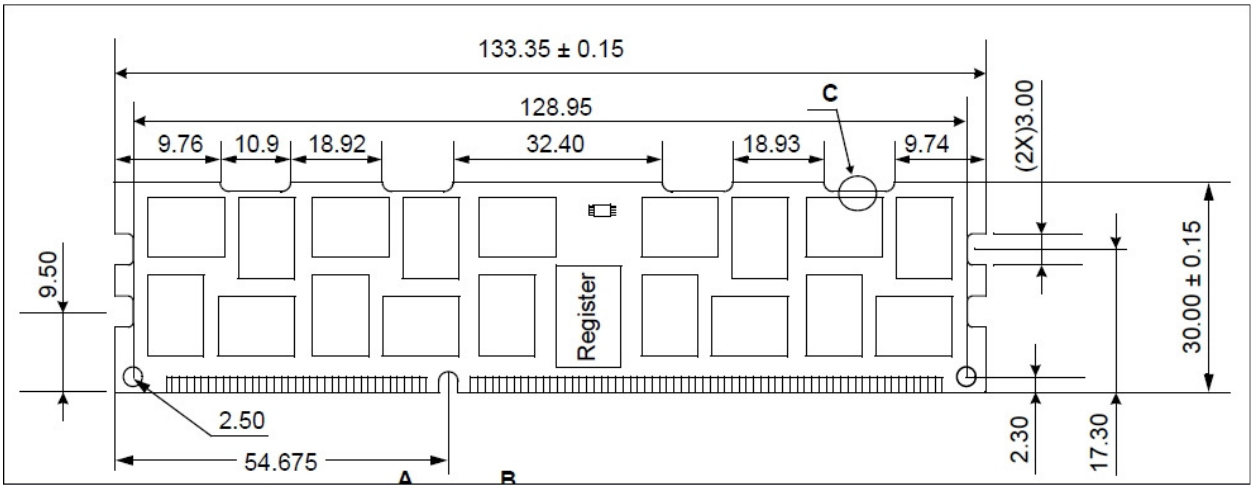

Copyright © 2011 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.